



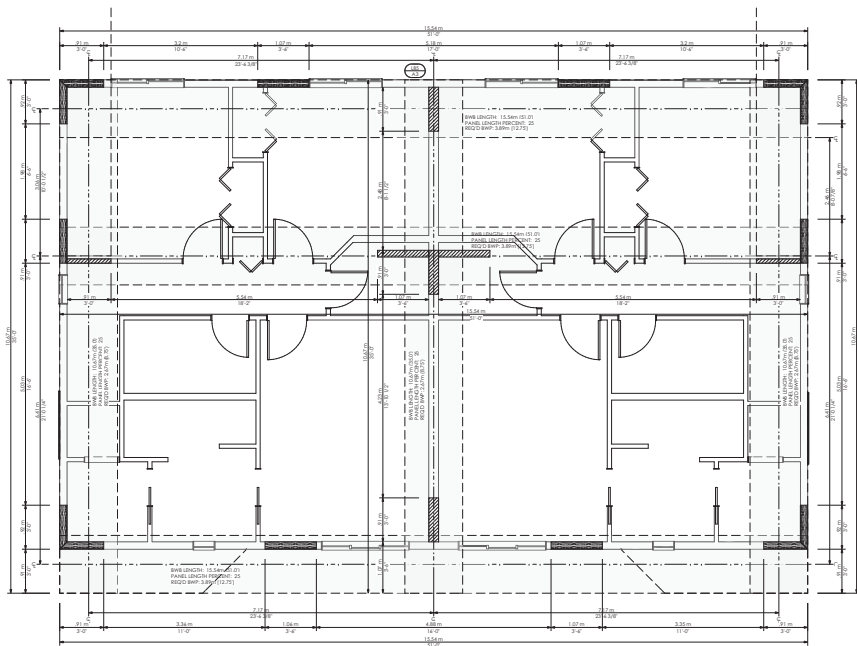

SEISMIC PLAN - SECOND FLOOR
1/8" = 1'-0"

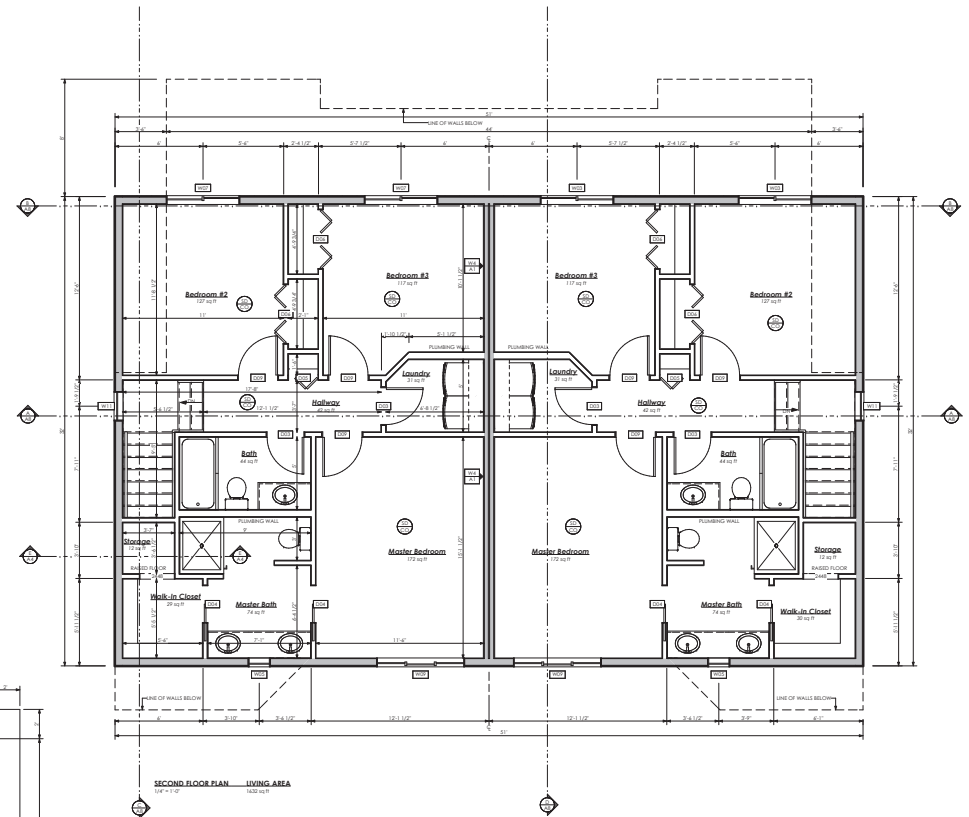

SECOND FLOOR PLAN - LIVING AREA
1/8" = 1'-0"

ADDITIONAL BRACING REQUIREMENTS - SECOND FLOOR


SEISMIC REGION: HIGH - STANDARD PROVISIONS
SEISMIC ZONE: 2
SEISMIC ZONE FACTOR: 1.0
CORRELATION TYPE: RIGID JOINT
ROOMS SUPPORTED: STANDARD PROVISIONS
MAXIMUM BRACED WALL BAND SPACING: STANDARD PROVISIONS
MAXIMUM DISTANCE BETWEEN BRACED WALLS: STANDARD PROVISIONS
MAXIMUM DISTANCE FROM PANEL TO END OF BAND: STANDARD PROVISIONS
MINIMUM PANEL LENGTH: CONNECTED AT CORNERS - 400mm (16")
MINIMUM TOTAL PANEL LENGTH AS PERCENT OF BAND LENGTH: 20%

LEGEND:

BRACED WALL BAND/ROOFLINE

WOOD SHEARWALL BRACED WALL PANEL

GYPSON SHEARWALL BRACED WALL PANEL

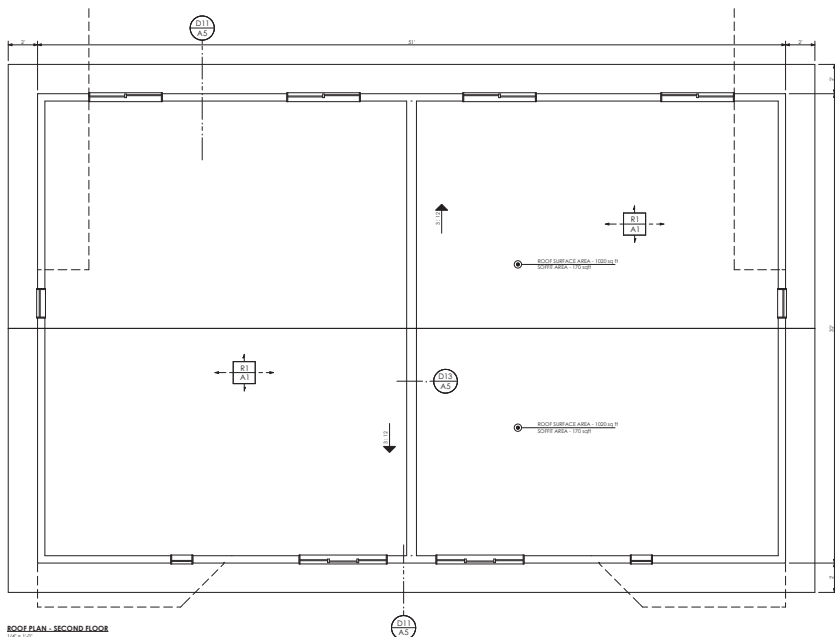

ROOF PLAN - SECOND FLOOR
1/8" = 1'-0"

